

1 TROUTMAN SANDERS LLP  
2 Marcus T. Hall, Bar No. 206495  
3 marcus.hall@troutmansanders.com  
4 Dean A. Morehous, Bar No. 111841  
5 dean.morehous@troutmansanders.com  
6 Craig C. Crockett, Bar. No. 265161  
7 craig.crockett@troutmansanders.com  
8 Ryan A. Lewis, Bar. No. 307253  
9 ryan.lewis@troutmansanders.com  
10 580 California Street, 11th floor  
11 San Francisco, CA 94104  
12 Telephone: 415.477.5700  
13 Facsimile: 415.477.5710

14 Attorneys for Plaintiff  
15 KENU, INC.

16 UNITED STATES DISTRICT COURT  
17 NORTHERN DISTRICT OF CALIFORNIA

18 KENU, INC.,

19 Plaintiff,

20 v.

21 ESTABLISHED BRANDS, INC., a  
22 Minnesota corporation, and DOES 1  
23 through 10, inclusive,

24 Defendants.

Case No.

**COMPLAINT FOR PATENT  
INFRINGEMENT, TRADE DRESS  
INFRINGEMENT, UNFAIR  
COMPETITION (CAL. BUS. & PROF.  
CODE § 17200), AND COMMON LAW  
UNFAIR COMPETITION**

**DEMAND FOR JURY TRIAL**

1 Plaintiff Kenu, Inc. (“Kenu”), for its Complaint alleges as follows:

2 1. Kenu is a San Francisco company that specializes in combining technology, art,  
3 and design in creating mobile phone products and accessories. Such products include portable  
4 hands free in-car mounts for mobile or smartphone devices that attaches to any car air vent  
5 (hereafter “AIRFRAME”). Kenu’s AIRFRAME met immediate success for its elegant design  
6 and superior functionality over traditional car mounts, which are often bulky or rely on adhesives  
7 that detach over time. Seeking to capitalize on Kenu’s success, competitors began copying  
8 Kenu’s innovative design and distinctive AIRFRAME trade dress to “free ride” on the efforts of  
9 Kenu. This action seeks to remedy the unauthorized sale of a knock-off product sold by  
10 defendants.

11 **THE PARTIES**

12 2. Kenu is a corporation organized and existing under the laws of Delaware and  
13 having a place of business at 560 Alabama Street, San Francisco, California 94110.

14 3. Defendant Established Brands, Inc. (“Established Brands”) is a corporation  
15 organized and existing under the laws of Minnesota and having a place of business at 5850 Opus  
16 Parkway, Suite 250, Minnetonka, Minnesota 55343, with business activities throughout the  
17 world and on the World Wide Web, including at [www.bitsmade.com](http://www.bitsmade.com). Established Brands sells  
18 products under various brand names, including under the name “BITS MADE.”

19 4. Kenu does not know the true names and capacities of DOES 1 through 10,  
20 inclusive, and therefore sues them by these fictitious names. When the true names and capacities  
21 are discovered for these DOE defendants, Kenu will seek to amend this Complaint to allege the  
22 true names and capacities in lieu of the fictitious names. Kenu is informed and believes that  
23 each of the fictitiously named defendants is responsible in some manner for the occurrences  
24 alleged in this Complaint.

25 5. On information and belief, defendants are, and at all times mentioned herein  
26 were, the alter egos, parents, subsidiaries, agents, partners, associates, joint-venturers, servants,  
27 employees, and/or other authorized representatives of each other, and in doing the things herein  
28 alleged were acting within the course and scope of their authority, agency, and employment, and

1 with the knowledge, consent, and approval of their fellow defendants.

2 6. On information and belief, defendants are, and at all times mentioned herein  
3 were, the alter egos, parents, subsidiaries, agents, partners, associates, joint-venturers, servants,  
4 employees, and/or other authorized representatives of each other, and in doing the things herein  
5 alleged were acting within the course and scope of their authority, agency, and employment, and  
6 with the knowledge, consent, and approval of their fellow defendants.

### 7 **JURISDICTION**

8 7. This is a civil action seeking damages and injunctive relief for patent  
9 infringement, trade dress infringement, unfair competition under California Business and  
10 Professions Code § 17200 et seq., and common law unfair competition.

11 8. Pursuant to 28 U.S.C. § 1331, this Court has federal subject matter jurisdiction  
12 over Kenu's claims for patent and trade dress infringement. Further, this Court has subject  
13 matter jurisdiction pursuant to the following statutes: 28 U.S.C. § 1338(a) (Acts of Congress  
14 relating to patents); 15 U.S.C. § 1121 et seq. (the Lanham Act); and 28 U.S.C. § 1367 (a)  
15 (supplemental jurisdiction over state and common-law claims).

16 9. The Northern District of California has personal jurisdiction over Established  
17 Brands because, among other things, Established Brands is engaged in wrongful conduct within  
18 the state of California and in this District, including placing into commerce goods infringing  
19 upon Kenu's patent and trade dress rights in this judicial district, including at least at a Target  
20 Store located in Emeryville, California. Established Brands has maintained substantial,  
21 continuous, and systematic contacts with the state of California through its business dealings and  
22 activities within and with residents of the state of California. Established Brands's conduct  
23 causes injury to and is directed at Kenu and its intellectual property in the state of California.  
24 But for Established Brands's conduct, Kenu would not have suffered damage.

### 25 **VENUE AND INTRADISTRICT ASSIGNMENT**

26 10. Venue is proper within this District under 28 U.S.C. § 1391(b) and (c) because  
27 each defendant transacts business within this District and offers for sale and sells in this District  
28 products that infringe Kenu's intellectual property rights. Pursuant to Local Rule 3-2(c),

intellectual property actions are assigned on a district-wide basis.

## **FACTS APPLICABLE TO ALL CLAIMS**

### **Kenu's AIRFRAME and Intellectual Property**

11. Kenu is a successful mobile phone accessory business that designs, develops, and distributes artistic and functional mobile phone accessories that are one of a kind in today's marketplace. One such product is Kenu's AIRFRAME, a line of portable hands free in-car mounts for mobile devices.

12. A representative image of Kenu's AIRFRAME product is provided below:




13. The original AIRFRAME was released in 2013 and has received acclaim for the utility and elegant design. In 2014, Kenu released the AIRFRAME+, which has a sleek, new design consistent with the original AIRFRAME. The AIRFRAME product line is sold through numerous merchandisers, retailers, and stores nationwide, including Amazon, Target, T-Mobile, Sprint, and Staples, to name just a few. Kenu also markets and sells its AIRFRAME products on the Internet, including through its website located at [www.kenu.com](http://www.kenu.com).

14. In addition to its common law rights, Kenu sought protection for its intellectual property rights associated with AIRFRAME by filing for patents.

15. On October 1, 2013, the United States Patent and Trademark Office issued United States Patent No. US D690,707 (the "'D707 patent'"), entitled "Dashboard Vent Mount for an Electronic Device," for a portable hands free in-car mount for mobile devices. *See attached Exhibit A.*


16. A representative figure from Kenu's 'D707 patent is provided below:

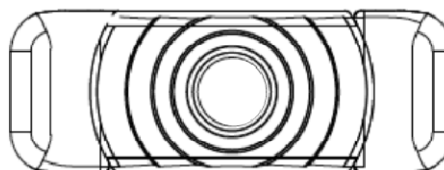

17. On December 11, 2012, the inventors of the 'D707 patent, Kenneth Minn and David E. Yao, assigned all of their patent rights in the 'D707 patent to Kenu, which has continuously held the rights to the 'D707 patent since that date.

18. On July 14, 2015, the United States Patent and Trademark Office issued United States Patent No. US 9,080,714 (the "'714 patent"), entitled "Adjustable Portable Device Holder," for a portable mount for portable devices. *See attached Exhibit B.*

19. A representative figure from Kenu's '714 patent is provided below:

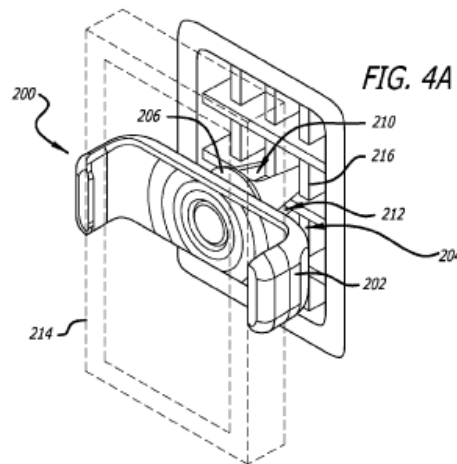

20. On May 17, 2013, the inventors of the '714 patent, Kenneth Y. Minn and David E. Yao, assigned all of their patent rights in the '714 patent to Kenu, which has continuously held the rights to the '714 patent since that date.

21. The trade dress associated with Kenu's AIRFRAME product is distinctive, non-functional, and is owned by Kenu.

22. The trade dress of Kenu's AIRFRAME product incorporates a unique form factor not previously incorporated into any similar product and also includes ornamental features comprising: (a) an aspect ratio of approximately three to one of length to width, (b) an aspect ratio of approximately one to one of width to height, (c) a rectangular shape, (d) a contrasting light and dark color scheme, (e) a distinct center face geometrical shape and logo, (f) a centered vent mount clip when in the closed position, and (g) rounded edges. The foregoing features are silhouetted when the device is both closed and in use.

23. The trade dress associated with Kenu's AIRFRAME product signifies the source of the AIRFRAME product to its customers.

24. As a result of considerable efforts, Kenu's customers, and the general public, have come to recognize Kenu as an established and successful mobile phone accessory business.

25. Kenu's AIRFRAME product is one of a kind.

26. Kenu's AIRFRAME product is manufactured with high quality materials designed to maximize product durability and customer satisfaction.

27. Kenu's designs are its own intellectual property. No goods of these designs existed prior to Kenu's designs and patents.

28. The AIRFRAME product is Kenu's most sought after and sold product.

29. Kenu makes substantial revenue from the AIRFRAME product.

#### **Established Brands's Infringing Products**

30. On information and belief, Established Brands manufactures and/or imports, or causes to be manufactured and/or imported its BITS MADE brand "CAR MOUNT Universal Phone Holder" product ("Phone Holder") products into the United States and the Northern District of California.

31. On information and belief, Established Brands exposes for sale, offers to sell, and sells the infringing BITS MADE Phone Holder, including to residents in the Northern District of California, through third party retailers and a reseller program available at least through the website [www.bitsmade.com](http://www.bitsmade.com).

32. The BITS MADE Phone Holder competes with Kenu's AIRFRAME products in the market for portable hands free in-car mounts for mobile or smartphone devices.

33. Kenu purchased the BITS MADE Phone Holder at a Target Corporation retail location located in Emeryville, California. Representative images are provided below:

///

///

///

///



34. The BITS MADE Phone Holder available from Established Brands violates Kenu's patent and trade dress rights.

35. Kenu's 'D707 patent covers the BITS MADE Phone Holder manufactured, imported, exposed for sale, offered for sale, and sold by Established Brands.

36. Kenu's '714 patent covers the BITS MADE Phone Holder manufactured, imported, offered for sale, and sold by Established Brands.

37. The BITS MADE Phone Holder violates Kenu's trade dress rights in its AIRFRAME product by causing confusion among ordinary consumers as to the source, sponsorship, affiliation, or approval of Kenu's AIRFRAME product.

38. Representative side-by-side comparisons of AIRFRAME and BITS MADE Phone Holder products are provided below:

///


///

///

///

///

///

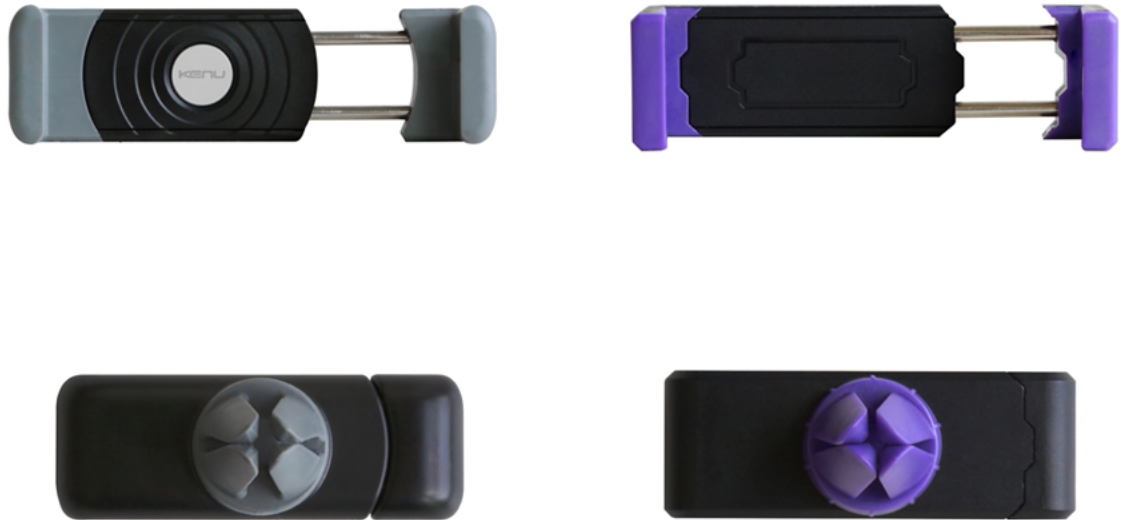

39. Established Brands's willful and deliberate actions have caused significant harm to Kenu. Kenu has lost customers and revenue due to the illegal and infringing product being put into the stream of commerce by Established Brands.

**FIRST CLAIM FOR RELIEF**  
**INFRINGEMENT OF THE 'D707 PATENT**  
**35 U.S.C. § 271(a)**

40. Kenu restates and incorporates all previous allegations of this Complaint by reference as though set forth in full.

41. Established Brands has infringed upon the rights of Kenu's 'D707 patent by making, exposing for sale, offering to sell, selling, and importing the BITS MADE Phone Holder in the United States.

42. Established Brands will continue to infringe the 'D707 patent unless enjoined by this Court.

43. Established Brands's acts are willful, in disregard of, and with indifference to, the rights of Kenu.



44. As a direct and proximate cause of the infringement by Established Brands, Kenu is entitled to damages, reasonable royalties and lost profits in amounts to be proven at trial, enhanced damages, and reasonable attorney's fees pursuant to 35 U.S.C. § 285. Additionally, Established Brands is liable to Kenu to the extent of its total profit, but not less than \$250, pursuant to 35 U.S.C. § 289.

**SECOND CLAIM FOR RELIEF**  
**INFRINGEMENT OF THE '714 PATENT**  
**35 U.S.C. § 271(a)**

45. Kenu restates and incorporates all previous allegations of this Complaint by reference as though set forth in full.

46. Established Brands has infringed upon the rights of Kenu's '714 patent by making, offering to sell, selling, and importing the BITS MADE Phone Holder product in the United States.

47. Established Brands will continue to infringe the '714 patent unless enjoined by this Court.

48. Established Brands's acts are willful, in disregard of, and with indifference to, the rights of Kenu.

49. As a direct and proximate cause of the infringement by Established Brands, Kenu is entitled to damages, reasonable royalties and lost profits in amounts to be proven at trial, enhanced damages, and reasonable attorney's fees pursuant to 35 U.S.C. § 285.

**THIRD CLAIM FOR RELIEF**  
**TRADE DRESS INFRINGEMENT**  
**15 U.S.C. § 1125(a)(1)**

50. Kenu restates and incorporates all previous allegations of this Complaint by reference as though set forth in full.

51. Established Brands has engaged in infringement of Kenu's trade dress rights in its AIRFRAME product by placing into commerce the BITS MADE Phone Holder.

52. Established Brands has offered and sold the BITS MADE Phone Holder despite knowledge that the BITS MADE Phone Holder being offered and sold are each likely to cause

1 confusion among ordinary consumers as to the source, sponsorship, affiliation, or approval of  
2 Kenu's AIRFRAME product.

3 53. Established Brands's acts are willful, in disregard of, and with indifference to the  
4 rights of Kenu.

5 54. As a direct and proximate cause of the infringement by Established Brands, Kenu  
6 is entitled to damages, reasonable royalties and lost profits in amounts to be proven at trial,  
7 enhanced damages, and reasonable attorney's fees pursuant to 15 U.S.C. § 1117.

8 **FOURTH CLAIM FOR RELIEF**  
9 **UNFAIR COMPETITION**  
10 **CALIFORNIA BUSINESS AND PROFESSIONS CODE § 17200 ET SEQ.**

11 55. Kenu restates and incorporates all previous allegations of this Complaint by  
12 reference as though set forth in full.

13 56. The above-described acts and omissions, including, but not limited to, Established  
14 Brands's continued infringement of Kenu's design and utility patents, and its infringement of  
15 Kenu's trade dress rights, constitute Unfair Competition under Section 17200 et. seq. of the  
16 California Business & Professions Code.

17 57. By reason of these wrongful acts and omissions by Established Brands, Kenu has  
18 suffered and will suffer damage. Additionally, these wrongful acts and omissions by Established  
19 Brands have caused, and unless restrained and enjoined by this Court will continue to cause,  
20 serious irreparable injury and damage to Kenu.

21 **FIFTH CLAIM FOR RELIEF**  
22 **UNFAIR COMPETITION**  
23 **COMMON LAW**

24 58. Kenu restates and incorporates all previous allegations of this Complaint by  
25 reference as though set forth in full.

26 59. The above-described acts and omissions, including, but not limited to, Established  
27 Brands's continued infringement of Kenu's design and utility patents, and its infringement of  
28 Kenu's trade dress rights, constitute Unfair Competition at Common Law.

60. By reason of these wrongful acts and omissions by Established Brands, Kenu has  
suffered and will suffer damage. Additionally, these wrongful acts and omissions by Established

Brands have caused, and unless restrained and enjoined by this Court will continue to cause, serious irreparable injury and damage to Kenu.

**PRAYER FOR RELIEF**

Wherefore, Kenu prays for judgment as follows against each defendant:

1. Injunctive relief;
2. Reasonable royalties in an amounts to be proven at trial;
3. Lost profits in an amount to be proved at trial;
4. Established Brands, Inc.'s total profit, but not less than \$250, pursuant to 35 U.S.C. § 289;
5. Kenu's attorney's fees and costs as provided by law; and
6. Such other relief as the Court deems appropriate.

**DEMAND FOR JURY TRIAL**

In accordance with Rule 38 of the Federal Rules of Civil Procedure, Kenu respectfully demands a jury trial of all issues triable to a jury in this action.

Dated: September 8, 2016

TROUTMAN SANDERS LLP

By: /s/ Marcus T. Hall

Marcus T. Hall  
Attorneys for Plaintiff  
KENU, INC.

## **Exhibit A**

US009080714B2

(12) **United States Patent**  
**Minn et al.**(10) **Patent No.:** **US 9,080,714 B2**  
(45) **Date of Patent:** **Jul. 14, 2015**(54) **ADJUSTABLE PORTABLE DEVICE HOLDER**(71) Applicant: **Kenu Inc.**, San Francisco, CA (US)(72) Inventors: **Kenneth Y. Minn**, San Francisco, CA (US); **David E. Yao**, San Francisco, CA (US)(73) Assignee: **Kenu, Inc.**, San Francisco, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/897,062**(22) Filed: **May 17, 2013**(65) **Prior Publication Data**

US 2014/0138419 A1 May 22, 2014

**Related U.S. Application Data**

(63) Continuation-in-part of application No. 29/437,793, filed on Nov. 20, 2012, now Pat. No. Des. 690,707.

(51) **Int. Cl.****B60R 7/06** (2006.01)**B60R 11/02** (2006.01)**F16M 13/02** (2006.01)**F16M 11/04** (2006.01)**F16M 11/10** (2006.01)**F16M 13/00** (2006.01)**B60R 11/00** (2006.01)(52) **U.S. Cl.**CPC ..... **F16M 13/022** (2013.01); **F16M 11/041** (2013.01); **F16M 11/105** (2013.01); **F16M 13/00** (2013.01); **B60R 11/0241** (2013.01); **B60R 11/0258** (2013.01); **B60R 2011/0008** (2013.01); **B60R 2011/0294** (2013.01); **Y10S 224/929** (2013.01); **Y10T 29/49826** (2015.01)(58) **Field of Classification Search**CPC ..... B60R 7/06; B60R 2011/0005; B60R 2011/0008; B60R 11/0241; B60R 11/0258; B60R 2011/0294; Y10S 224/929  
USPC ..... 224/483, 556, 275, 929, 544, 276  
See application file for complete search history.(56) **References Cited**

## U.S. PATENT DOCUMENTS

5,109,411 A \* 4/1992 O'Connell ..... 379/454  
5,305,381 A † 4/1994 Wang  
5,338,252 A \* 8/1994 Bowler et al. .... 454/155  
5,979,724 A \* 11/1999 Loewenthal et al. .... 224/483  
6,103,201 A \* 8/2000 Green ..... 422/124

(Continued)

## FOREIGN PATENT DOCUMENTS

KR 10-2000-0044438 7/2000  
KR 20-0429528 10/2006  
WO 9604153 † 2/1996



## OTHER PUBLICATIONS

The International Search Report and the Written Opinion mailed Oct. 10, 2014; in PCT patent application No. PCT/US2014/038253, 12 pages.

(Continued)

*Primary Examiner* — Justin Larson*Assistant Examiner* — Scott McNurlen(74) *Attorney, Agent, or Firm* — Troutman Sanders, LLP(57) **ABSTRACT**

Adjustable portable device holder systems and methods are herein disclosed. According to one embodiment, an adjustable portable device holder includes an adjustable clamping element and a rotatable mounting element attached to the adjustable clamping element for removably securing a portable device to the adjustable portable device holder.

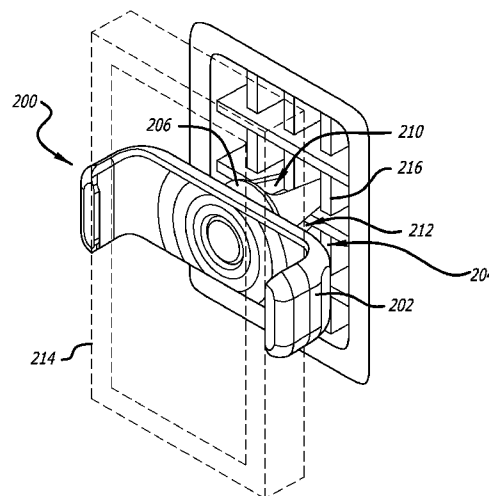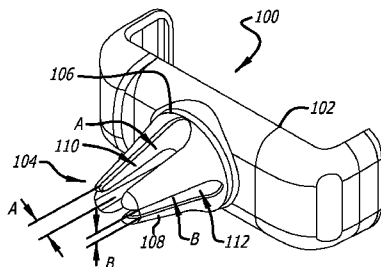**14 Claims, 5 Drawing Sheets**

**US 9,080,714 B2**

Page 2

(56)

**References Cited****U.S. PATENT DOCUMENTS**

6,366,672 B1 4/2002 Tsay  
 6,441,872 B1\* 8/2002 Ho ..... 348/837  
 D482,039 S 11/2003 Chen et al.  
 6,988,907 B2 1/2006 Chang  
 7,061,386 B2† 6/2006 Seresini  
 7,080,812 B2\* 7/2006 Wadsworth et al. .... 248/316.6  
 7,140,553 B2\* 11/2006 Zobebe ..... 239/34  
 D538,912 S † 3/2007 Kaplan  
 7,272,984 B2 9/2007 Fan  
 7,284,737 B2\* 10/2007 Kane ..... 248/311.2  
 D589,962 S 4/2009 Maruyama et al.  
 D611,478 S 3/2010 Richardson et al.  
 D630,222 S 1/2011 Lin  
 D645,033 S\* 9/2011 Quong et al. .... D14/253  
 D656,931 S 4/2012 Wikel  
 D656,940 S 4/2012 McClelland et al.  
 D657,356 S 4/2012 Wikel  
 D663,726 S 7/2012 Gourley  
 D663,735 S 7/2012 Musselman

D664,147 S 7/2012 Zhao et al.  
 D671,950 S 12/2012 Richter  
 8,727,192 B2\* 5/2014 Lai ..... 224/420  
 8,757,461 B2\* 6/2014 Zanetti ..... 224/562  
 2005/0127538 A1† 6/2005 Fabrega  
 2007/0284500 A1\* 12/2007 Fan ..... 248/346.06  
 2008/0190978 A1\* 8/2008 Brassard ..... 224/483  
 2008/0224007 A1† 9/2008 Mo  
 2009/0060473 A1\* 3/2009 Kohte et al. .... 386/124  
 2010/0019059 A1\* 1/2010 Bulsink et al. .... 239/55  
 2011/0019992 A1 1/2011 Orf  
 2011/0278885 A1\* 11/2011 Procter et al. .... 297/135  
 2013/0037590 A1† 2/2013 Yoon  
 2014/0097306 A1\* 4/2014 Hale et al. .... 248/122.1  
 2014/0103087 A1† 4/2014 Fan

**OTHER PUBLICATIONS**

Arkon Resources Inc., SM429-SBH Universal Air Vent Swivel Mount with Adjustable Cradle, 2010.†

\* cited by examiner




† cited by third party



U.S. Patent

Jul. 14, 2015


Sheet 1 of 5

US 9,080,714 B2

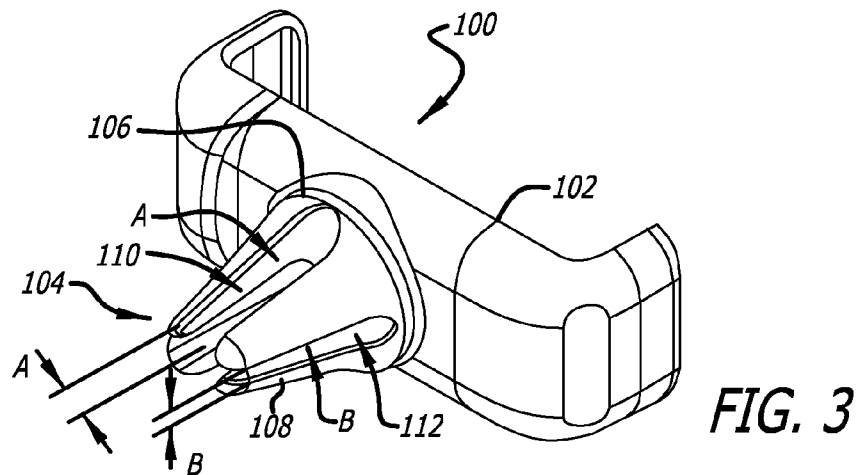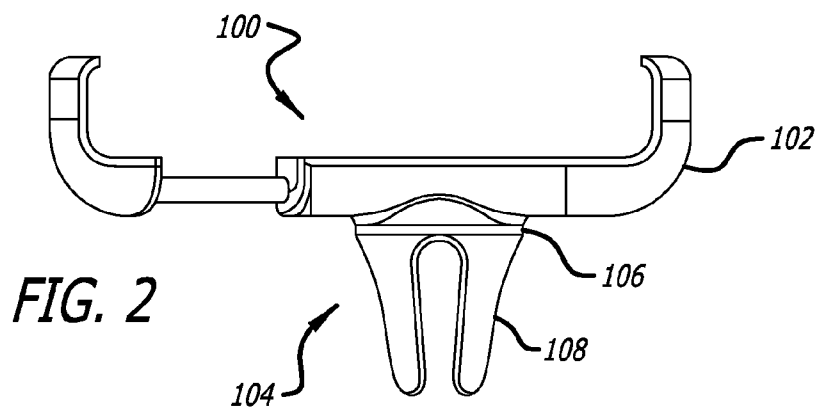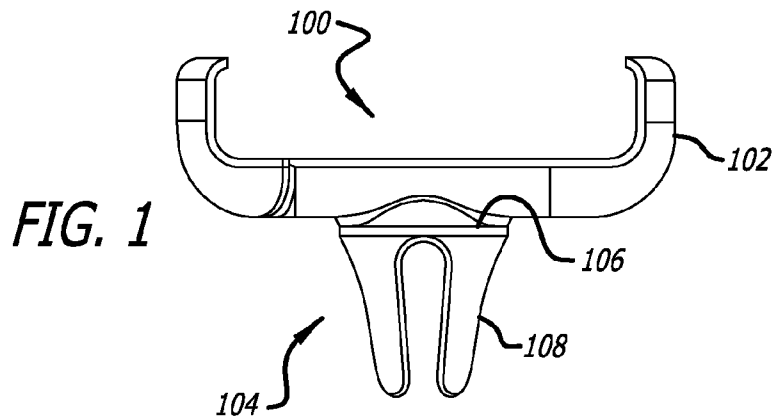

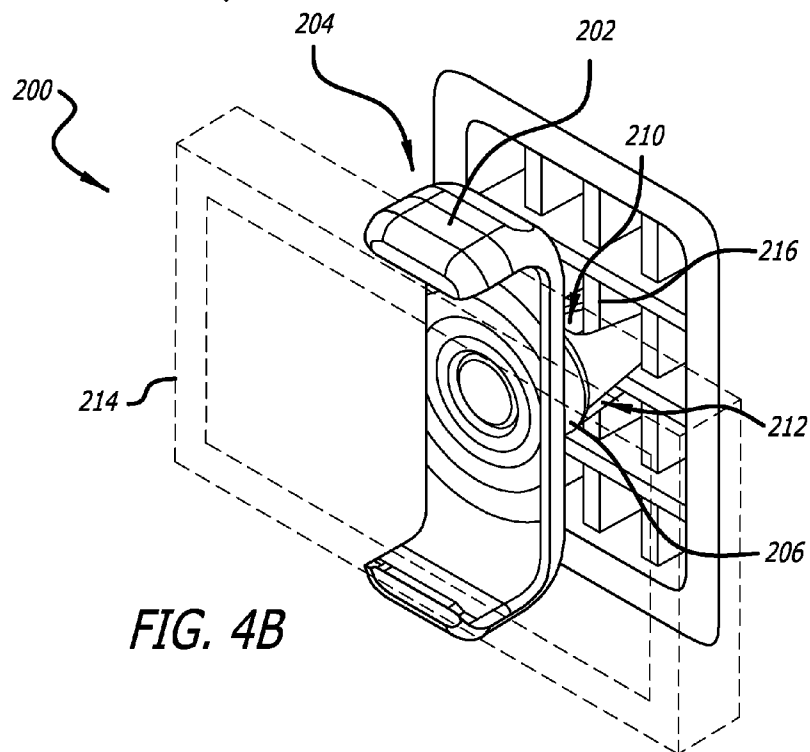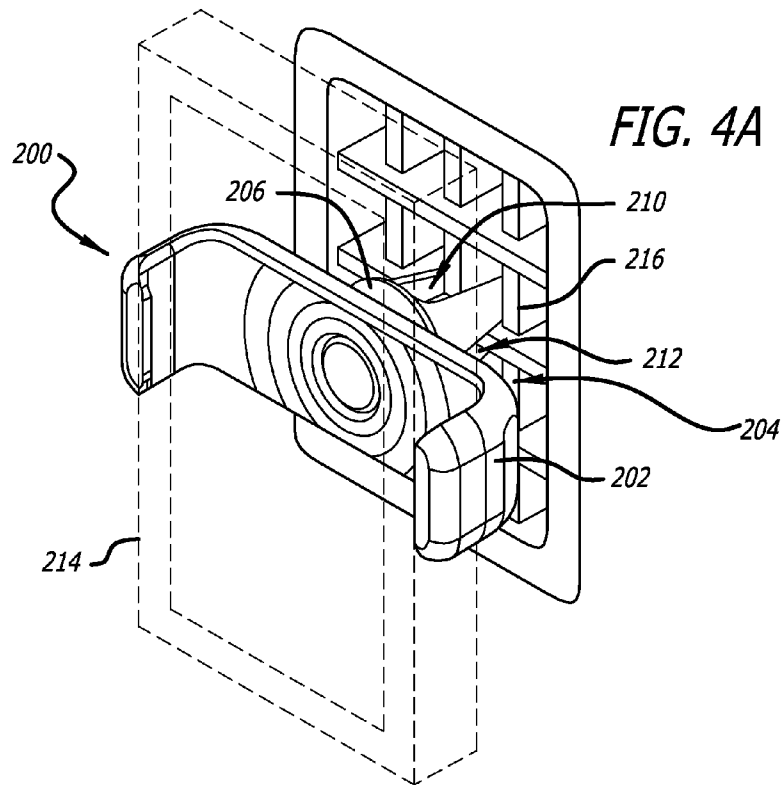



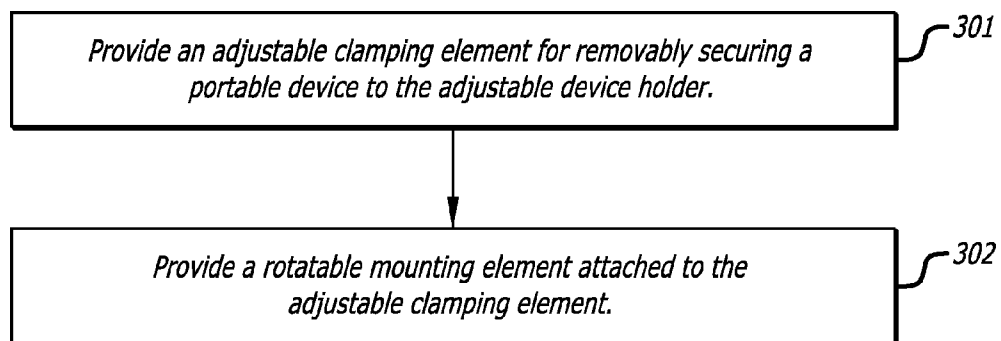

**FIG. 5**

U.S. Patent

Jul. 14, 2015

Sheet 4 of 5

US 9,080,714 B2




FIG. 6

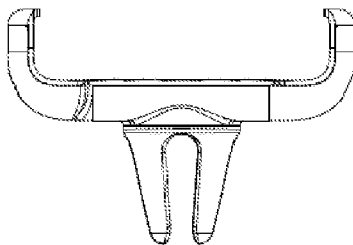


FIG. 7




FIG. 8




FIG. 9




FIG. 10

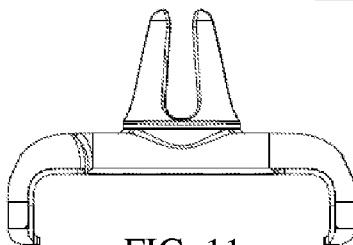


FIG. 11

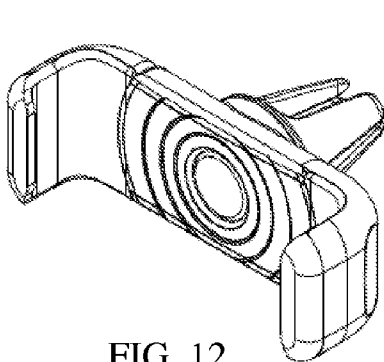


FIG. 12

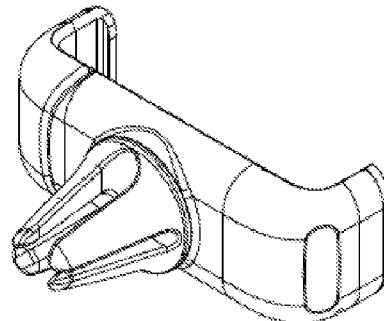


FIG. 13

U.S. Patent

Jul. 14, 2015

Sheet 5 of 5

US 9,080,714 B2




FIG. 14

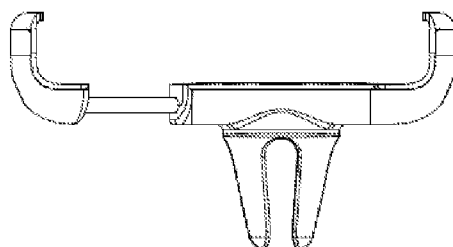


FIG. 15




FIG. 16




FIG. 17




FIG. 18

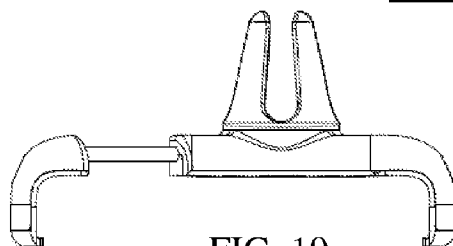


FIG. 19

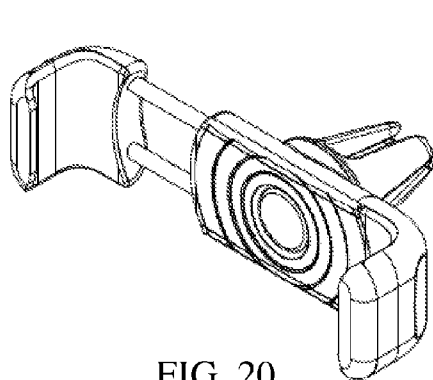


FIG. 20

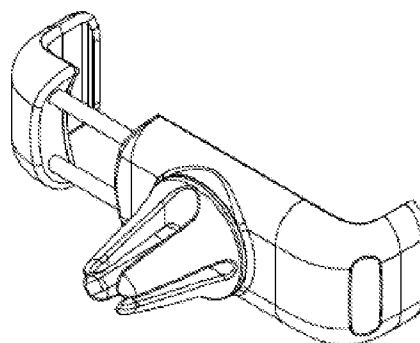


FIG. 21

US 9,080,714 B2

1

**ADJUSTABLE PORTABLE DEVICE HOLDER****CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a continuation-in-part (CIP) of U.S. Design patent application No. 29/437,793, filed Nov. 20, 2012 and titled DASHBOARD VENT MOUNT FOR AN ELECTRONIC DEVICE, which is incorporated by reference in its entirety, for all purposes, herein.

**FIELD OF TECHNOLOGY**

The present application is directed to adjustable portable device holder systems and methods.

**BACKGROUND**

Various electronic and other device mounts are known in the art. Available device mounts have many drawbacks. For instance, suction cup mounts are typically large, bulky and require a large mounting surface such as a windshield. Device mounts often fail to properly and consistently attach to the mounting surface. Some device mounting solutions require adhesive to secure the mount to a vehicle dash, wearing off over time and leaving an undesirable residue on the mounting surface. Current device mounts also fail to effectively accommodate a broad range of devices or mounting surfaces.

Due to the deficiencies in the currently available device mounts, people choose not use electronic device mounts and often violate state and provincial hands-free driving laws. Other state and provincial laws prohibit objects mounted to the windshield to prevent obstruction of the driver's view.

This specification is directed to improved portable device holder systems and methods for manufacturing the same.

**SUMMARY**

Adjustable portable device holder systems and methods for manufacturing the same are herein disclosed. According to one embodiment, an adjustable portable device holder includes an adjustable clamping element and a rotatable mounting element attached to the adjustable clamping element for removably securing a portable device to the adjustable portable device holder. The adjustable clamping element is capable of being biased into an activated state and unbiased into a deactivated state to secure one of a plurality of different size portable devices to the adjustable portable device holder. The rotatable mounting element, attached to the adjustable clamping element, includes a plurality of mounting arms each spaced a specified distance apart from one another and extending at a specified angle from a bottom surface of the rotatable mounting element. Each pair of the plurality of mounting arms forms a mounting slot therein between. The rotatable mounting element is capable of being rotated to position a first mounting slot in a vertical, horizontal or diagonal orientation and a second mounting slot in a vertical, horizontal or diagonal orientation to engage a first mounting surface in a vertical, horizontal or diagonal orientation or a second mounting surface in a vertical, horizontal or diagonal orientation.

In another embodiment, a process for manufacturing an exemplary adjustable portable device holder is disclosed. The process includes providing an adjustable clamping element capable of being biased into an activated state and unbiased into a deactivated state to secure one of a plurality of portable device sizes to the adjustable portable device holder. The

2

process also includes providing a rotatable mounting element comprising a plurality of mounting arms each spaced a specified distance apart from one another and extending at a specified angle from a bottom surface of the rotatable mounting element. Each pair of the plurality of mounting arms form a mounting slot therein between. The rotatable mounting element is capable of being rotated to position a first mounting slot in a vertical, horizontal or diagonal orientation and a second mounting slot in a vertical, horizontal or diagonal orientation to engage a first mounting surface in a vertical, horizontal or diagonal orientation or a second mounting surface in a vertical, horizontal or diagonal orientation. The process also includes attaching the rotatable mounting element to the adjustable clamping element.

The foregoing and other objects, features and advantages of the present disclosure will become more readily apparent from the following detailed description of exemplary embodiments as disclosed herein.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Embodiments of the present application are described, by way of example only, with reference to the attached Figures, wherein:

FIG. 1 illustrates an adjustable portable device holder in a retracted setting, also referred to as the deactivated state, according to one embodiment;

FIG. 2 illustrates an adjustable portable device holder in an expanded setting, referred to as the activated state, according to one embodiment;

FIG. 3 illustrates an adjustable portable device holder in a retracted setting according to one embodiment;

FIGS. 4A and 4B illustrate an adjustable portable device holder attached to a device and a mounting surface according to one embodiment;

FIG. 5 illustrates a flow chart of a process for manufacturing an exemplary adjustable portable device holder according to one embodiment;

FIG. 6 is an elevation view of the back of an adjustable portable device holder in a retracted setting;

FIG. 7 is a plan view of the top of an adjustable portable device holder in a retracted setting;

FIG. 8 is an elevation view of left side of an adjustable portable device holder in a retracted setting;

FIG. 9 is an elevation view of the front of an adjustable portable device holder in a retracted setting;

FIG. 10 is an elevation view of the right side of an adjustable portable device holder in a retracted setting;

FIG. 11 is a plan view of the bottom of an adjustable portable device holder in a retracted setting;

FIG. 12 is an isometric view, from the front right, of an adjustable portable device holder in a retracted setting;

FIG. 13 is an isometric view, from the back left, of an adjustable portable device holder in a retracted setting;

FIG. 14 is an elevation view of the back of an adjustable portable device holder in an expanded setting;

FIG. 15 is a plan view of the top of an adjustable portable device holder in an expanded setting;

FIG. 16 is an elevation view of left side of an adjustable portable device holder in an expanded setting;

FIG. 17 is an elevation view of the front of an adjustable portable device holder in an expanded setting;

FIG. 18 is an elevation view of the right side of an adjustable portable device holder in an expanded setting;

FIG. 19 is a plan view of the bottom of an adjustable portable device holder in an expanded setting;

US 9,080,714 B2

3

FIG. 20 is an isometric view, from the front right, of an adjustable portable device holder in an expanded setting; and FIG. 21 is an isometric view, from the back left, of an adjustable portable device holder in an expanded setting.

## DETAILED DESCRIPTION

It will be appreciated that for simplicity and clarity of illustration, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements. In addition, numerous specific details are set forth in order to provide a thorough understanding of the example embodiments described herein. However, it will be understood by those of ordinary skill in the art that the example embodiments described herein may be practiced without these specific details. In other instances, methods, procedures and components have not been described in detail so as not to obscure the embodiments described herein.

The adjustable portable device holders described in this specification can include an adjustable clamping element attached to a rotatable mounting element. The adjustable portable device holder can be used to attach and mount a portable device to a mounting surface. The portable device can be any device that fits into the adjustable clamping element including, but not limited to a smartphone or other phone, a tablet, an e-reader, a powerbank, a speaker, a multimedia player, a flashlight or other light, a television or other display, a laser or radar detector, an air freshener, a fan, a beverage or other device that can fit into the adjustable clamping element. The adjustable portable device holder can be mounted to various mounting surfaces including, but not limited to an automobile air conditioner vent blade, an automobile dashboard, an automobile sun visor, a credit card, the brim of a hat, a counter, a tripod, a bicycle, a backpack, a utensil, a ledge or other surface.

FIG. 1 illustrates an adjustable portable device holder 100 in a retracted setting according to one embodiment. The adjustable portable device holder 100 includes an adjustable clamping element 102 attached to a rotatable mounting element 104.

FIG. 2 illustrates an adjustable portable device holder 100 in an expanded setting according to one embodiment. The adjustable portable device holder 100 includes an adjustable clamping element 102 attached to a rotatable mounting element 104.

FIG. 3 illustrates an adjustable portable device holder 100 in a retracted setting according to one embodiment. The adjustable portable device holder 100 includes an adjustable clamping element 102 attached to a rotatable mounting element 104.

The adjustable clamping element 102 illustrated in FIGS. 1-3 can be expanded and retracted to attach devices of different sizes to the adjustable portable device holder 100. A force can be applied to expand or bias the adjustable clamping element 102 into an activated state (shown in FIG. 2) and the force can be released to retract the adjustable clamping element 102 into a deactivated state (shown in FIGS. 1 and 3). An elastic retracting or biasing element (not shown), such as a compression or torsion spring can be incorporated into the adjustable clamping element 102. The compression or torsion spring facilitates the expansion and retraction of the adjustable clamping element 102 upon applying or releasing an expansive force on a surface of the adjustable clamping element 102.

The adjustable clamping element 102 can also include a gripping material on a surface of the adjustable clamping element 102 to provide a better grip, a better viewing angle or

4

better attachment to a device secured within the adjustable clamping element 102. The gripping material can be applied to a portion of the adjustable clamping element 102 or the entire adjustable clamping element 102 can be made of the gripping material. The gripping material can be any material that increases the adhesion, grip or coefficient of friction between the gripping surface of the adjustable clamping element 102 and a surface of a device secured within the adjustable clamping element 102. The gripping material can include, but is not limited to rubber, polymeric material or other plastic, metal, alloy, fabric, composite material or other material capable of increasing the adhesion, grip or coefficient of friction between the gripping surface of the adjustable clamping element 102 and a surface of a device secured within the adjustable clamping element 102. The gripping material and gripping surface can be textured and composed of the same or different material.

The rotatable mounting element 104 illustrated in FIGS. 1-3 can be directly or indirectly attached to the adjustable clamping element 102. The adjustable clamping element 102 and the rotatable mounting element 104 can be one integral part or component parts that are attached together by any attaching means that allows the rotatable mounting element 104 to rotate. The rotatable mounting element 104 includes a base plate 106 and a plurality of mounting arms 108 extending from the base plate 106. The base plate 106 and the plurality of mounting arms 108 can be one integral part or component parts that are attached together by any attaching means.

Referring to FIG. 3, the base plate 106 can be a cylindrically shaped disc or other element that is capable of being rotated 360 degrees clockwise or counter-clockwise. The base plate 106 provides a rotating platform from which mounting arms 108 extend. The mounting arms 108 are spaced a specified distance apart relative to one another on the base plate 106. The mounting arms 108 also extend from the base plate 106 at a specified angle relative to the base plate 106. The size of the mounting arms 108, the distance between the mounting arms 108 and the angle at which the mounting arms 108 extend from the base plate 106 establish and define mounting slots 110, 112 between pairs of mounting arms 108. The rotatable mounting element 104 can include any number of mounting arms 108 and any number of mounting slots 110, 112.

The mounting arms 108 can also include a gripping material on a surface of the mounting arms 108 to provide a better grip, a better viewing angle or better attachment to a mounting surface secured between the mounting arms 108. The gripping material can be applied to a portion of mounting arms 108 or the entirety of the mounting arms 108 can be made of the gripping material. The gripping material can be any material that increases the adhesion, grip or coefficient of friction between the gripping surface of mounting arms 108 and a mounting surface secured between the mounting arms 108. The gripping material can include, but is not limited to rubber, polymeric material or other plastic, metal, alloy, fabric, composite material or other material capable of increasing the adhesion, grip or coefficient of friction between the gripping surface of mounting arms 108 and a mounting surface secured between the mounting arms 108. The gripping material and gripping surface can be textured and composed of the same or different material.

In one exemplary embodiment, the rotatable mounting element 104 includes four mounting arms and four mounting slots. In another exemplary embodiment, the rotating mounting element 104 includes 6 mounting arms and six mounting slots.

## US 9,080,714 B2

5

The mounting arms **108** and mounting slots **110**, **112**, can engage a mounting surface (not shown) to mount the adjustable portable device holder **100**. The adjustable portable device holder **100** is mounted to a mounting surface by positioning, press fitting or wedging a mounting surface within one or more mounting slots **110**, **112** to engage two or more mounting arms **108**. The adjustable portable device holder **100** can be mounted to various mounting surfaces including, but not limited to an automobile air conditioner vent blade, an automobile dashboard, an automobile sun visor, a credit card, the brim of a hat, a counter, a tripod, a bicycle, a backpack, a utensil, a ledge or other surface that can be positioned, press fit or wedged within one or more mounting slots **110**, **112** between two or more mounting arms **108**.

The rotatable mounting element **104** can include any number of mounting arms **108** forming and defining any number of mounting slots **110**, **112**. As may be appreciated in at least FIGS. 1-3, 7, 8, 10, 11, 15, 16, 18 and 19, the size and shape of the mounting slots **110**, **112** formed between pairs of mounting arms **108** can be controlled by adjusting the size and shape of the paired mounting arms **108**, the distance between the pair of mounting arms **108** and the angle at which the two mounting arms **108** extend from the base plate **106** and converge toward one another. As depicted, each mounting arm **108** and mounting slot **110**, **112** tapers in a direction away from a bottom surface of the rotatable mounting element **104**. The rotatable mounting element **104** can include one or more different size mounting slots **110**, **112** to accommodate different size mounting surfaces. For instance in FIG. 3, one mounting slot **110** having clearance A can be larger than another mounting slot **112** having clearance B. One or more of the mounting slots **110** formed on the rotatable mounting element **104** can accommodate a larger mounting surface than other mounting slots **112** formed on the rotatable mounting element **104**.

The rotatable mounting element **104** can be rotated to position the mounting arms **108** and mounting slots **110**, **112** in a horizontal plane, vertical plane, diagonal plane, circular plane, concave plane, convex plane or any plane between vertical and horizontal planes relative to the force of gravity. The mounting arms **108** and mounting slots **110**, **112** can be positioned to engage a mounting surface in any engagement plane within the 360 degree rotation of the mounting element **104**. The rotatable mounting element **104** can be rotated to position a relatively larger mounting slot **110** with clearance A in a horizontal, vertical, diagonal, circular, concave or convex plane to engage a relatively larger mounting surface in a horizontal, vertical, diagonal, circular, concave or convex engagement plane. The rotatable mounting element **104** can also be rotated to position a relatively smaller mounting slot **112** with clearance B in a horizontal, vertical, diagonal, circular, concave or convex plane to engage a relatively smaller mounting surface in a horizontal, vertical, diagonal, circular, concave or convex engagement plane.

The rotatable mounting element is capable of being rotated 360 degrees clockwise or counter-clockwise to engage different size mounting surfaces in a horizontal plane, vertical plane, diagonal plane, circular plane, concave plane, convex plane or any plane between vertical and horizontal planes. A device attached to the adjustable portable device holder **100** via the adjustable clamping element **102** can also be rotated 360 degrees clockwise or counter-clockwise while it is attached to the adjustable portable device holder **100** by rotating the rotatable mounting element **104**.

FIGS. 4A and 4B illustrate an adjustable portable device holder **200** attached to a device **214** and a mounting surface

6

**216** according to one embodiment. The device **214** is a smart phone and the mounting surface **216** is an automobile air conditioner vent blade.

Other portable devices can also fit into the adjustable clamping element including, but not limited to a tablet, an e-reader, a powerbank, a speaker, a multimedia player, a flashlight or other light, a television or other display, a laser or radar detector, an air freshener, a fan, a beverage or other device. The adjustable portable device holder **200** can also be mounted to other mounting surfaces including, but not limited to an automobile dashboard, an automobile sun visor, a credit card, the brim of a hat, a counter, a tripod, a bicycle, a backpack, a utensil, a ledge or other surface.

The adjustable portable device holder **200** includes an adjustable clamping element **202** attached to a rotatable mounting element **204**. The adjustable clamping element **202** can be expanded and retracted to attach different size smartphones to the adjustable portable device holder **200**. A force can be applied to expand or bias the adjustable clamping element **202** into an activated state and the force can be released to retract the adjustable clamping element **202** into a deactivated state to clamp around the smartphone **214**. An elastic retracting or biasing element (not shown), such as a compression or torsion spring can be incorporated into the adjustable clamping element **202** to facilitate the expansion and retraction of the adjustable clamping element **202** and to accommodate different size smartphones.

The adjustable clamping element **202** can also include a gripping material on a surface of the adjustable clamping element **202** to provide a better grip, a better viewing angle or better attachment to the smart phone **214** or other device secured within the adjustable clamping element **202**. The gripping material can be applied to a portion of the adjustable clamping element **202** or the entire adjustable clamping element **202** can be made of the gripping material. The gripping material can be any material that increases the adhesion, grip or coefficient of friction between the gripping surface of the adjustable clamping element **202** and a surface of a device secured within the adjustable clamping element **202**. The gripping material can include, but is not limited to rubber, polymeric material or other plastic, metal, alloy, fabric, composite material or other material capable of increasing the adhesion, grip or coefficient of friction between the gripping surface of the adjustable clamping element **202** and a surface of a device secured within the adjustable clamping element **202**. The gripping material and gripping surface can be textured and composed of the same or different material.

The rotatable mounting element **204** can be directly or indirectly attached to the adjustable clamping element **202**. The adjustable clamping element **202** and the rotatable mounting element **204** can be one integral part or component parts that are attached together by any attaching means, such as a screw, ratchet, pin, rod or friction or other device that allows the rotatable mounting element **204** to rotate. The rotatable mounting element **204** includes a base plate **206** and a plurality of mounting arms **208** extending from the base plate **206**. The base plate **206** and the plurality of mounting arms **208** can be one integral part or component parts that are attached together by any attaching means.

The base plate **206** can be a cylindrically shaped disc or other element that is capable of being rotated 360 degrees clockwise or counter-clockwise. The base plate **206** provides a rotating platform from which the mounting arms **208** extend. The mounting arms **208** are spaced a specified distance apart relative to one another on the base plate **206**. The mounting arms **208** also extend from the base plate **206** at a specified angle relative to the base plate **206**. The size of the



US 9,080,714 B2

7

mounting arms **208**, the distance between the mounting arms **208** and the angle at which the mounting arms **208** extend from the base plate **206** establish and define mounting slots **210**, **212** between pairs of mounting arms **208**. The rotatable mounting element **204** includes four mounting arms **208** and four mounting slots **210**, **212**.

The mounting arms **208** and mounting slots **210**, **212**, can engage and attach to an air conditioner vent blade **216** to mount the adjustable portable device holder **200**. The adjustable portable device holder **200** is mounted to the air conditioner vent blade **216** by positioning, press fitting or wedging a surface of the air conditioner vent blade **216** within one or more mounting slots **210**, **212** to engage two or more mounting arms **208**.

The mounting arms **208** can also include a gripping material on a surface of the mounting arms **208** to provide a better grip, a better viewing angle or better attachment to the air conditioner vent blade **216** secured between mounting arms **208**. The gripping material can be applied to a portion of mounting arms **208** or the entirety of the mounting arms **208** can be made of the gripping material. The gripping material can be any material that increases the adhesion, grip or coefficient of friction between the gripping surface of mounting arms **208** and an air conditioner vent blade **216** secured between the mounting arms **208**. The gripping material can include, but is not limited to rubber, polymeric material or other plastic, metal, alloy, fabric, composite material or other material capable of increasing the adhesion, grip or coefficient of friction between the gripping surface of mounting arms **208** and the air conditioner vent blade **216** secured between the mounting arms **208**. The gripping material can be and gripping surface and composed of the same or different material.

The rotatable mounting element **204** includes two different sizes of mounting slots **210**, **212** to accommodate different size air conditioner vent blades **216** or other mounting surfaces. Two mounting slots **210** having clearance A are larger than the other two mounting slots **212** having clearance B.

The rotatable mounting element **204** can be rotated to position the mounting arms **208** and mounting slots **210**, **212** in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes to engage air conditioner vent blades **216** oriented in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes. The mounting arms **208** and mounting slots **210**, **212** can be positioned to attach to an air conditioner vent blade in any engagement plane within the 360 degree rotation of the mounting element **204**. The rotatable mounting element **204** can be rotated to position the larger mounting slots **210** with clearance A in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes to engage or attach to larger air conditioner vent blades **216** oriented in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes. The rotatable mounting element **204** can also be rotated to position the smaller mounting slots **212** with clearance B in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes to engage or attach to smaller air conditioner vent blades **216** oriented in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes.

The rotatable mounting element **204** is capable of being rotated 360 degrees clockwise or counter-clockwise to engage different size mounting surfaces in a horizontal, vertical, diagonal, circular, concave, convex or any plane between vertical and horizontal planes relative to the force of

8

gravity. The smart phone **214** attached to the adjustable portable device holder **200** can be rotated into a portrait orientation (shown in FIG. 4A) and a landscape orientation (shown in FIG. 4B) by rotating the rotatable mounting element **204**. The smart phone **214** attached to the adjustable portable device holder **200** can be rotated 360 degrees clockwise or counter-clockwise while it is attached to the adjustable portable device holder **200** by rotating the smart phone **214** and adjustable clamping element **202**, while the rotatable mounting element **204** is secured to a mounting surface.

FIG. 5 illustrates a flow chart of a process for manufacturing an exemplary adjustable portable device holder according to one embodiment. At step **301**, the process includes providing an adjustable clamping element for removably securing a portable device to the adjustable portable device holder. The adjustable clamping element is capable of being biased into an activated state and unbiased into a deactivated state to secure one of a plurality of different size portable device to the adjustable portable device holder.

As an example and as depicted in FIGS. 2, 14, 15, 16 and 19-21, to manufacture the adjustable portable device holder, two stainless steel rods can be inserted into an expandable arm cavity of a double injection mold. PC/ABS is injected into the cavities of the mold to hold the rods in place and to produce an expandable arm, main body and cover of an adjustable clamping element. The mold is then rotated and injected with TPE to form side grips of the expandable arm and body of the adjustable clamping element. A stainless steel spring is inserted over each rod and held in place by a stainless steel screw affixed to the end of the rods. Grease is added to the lower portion of the spring and rods (near the screw head). The expandable arm is inserted into the body and the springs are lowered and held in place within the body of the adjustable clamping element. The cover is then slid on to the body to hold the adjustable arm in place.

The adjustable clamping element or a surface thereof can also be formed from rubber, polymeric material or other plastic, metal, alloy, or composite material that is rigid, semi-rigid or textured.

At step **302**, a rotatable mounting element is provided, which can be attached to the adjustable clamping element via screw, ratchet, pin, rod or friction or other attachment means. The rotatable mounting element includes a plurality of mounting arms each spaced a specified distance apart from one another and extending at a specified angle from a bottom surface of the rotatable mounting element. Each pair of the plurality of mounting arms form a mounting slot therein between. The rotatable mounting element is capable of being rotated to position a first mounting slot in a vertical, horizontal or diagonal orientation and a second mounting slot in a vertical, horizontal or diagonal orientation to engage a first mounting surface in a vertical, horizontal or diagonal orientation or a second mounting surface in a vertical, horizontal or diagonal orientation.

For example, a rotatable mounting element can be formed in whole or part from stainless metal or other metal, alloy or plastic sheet stamped to form a clip or base plate with four arms extending from the base plate, spaced a specified distance apart and bent to a desired angle. If metal or other heat treatable material, the rotatable mounting element can be heat treated to form a rigid structure. The rotatable mounting element or a surface thereof can also be formed from rubber, polymeric material or other plastic, metal, alloy, or composite material that is rigid, semi-rigid or textured.

A zinc-alloy nut or other alloy or material can be formed using a die-cast mold to attach the rotatable mounting element to the adjustable clamping element. Glue is added to the

US 9,080,714 B2

9

cavity of the nut. The rotatable mounting element is affixed to the main body of the adjustable clamping element via the nut and a second stainless screw. A force gage is used to monitor the rotational force of the rotatable mounting element and the rotatable mounting element is adjusted if screw is too tight or loose.

TPE is injected into a mold to create a skirt and four socks. The skirt and four socks can also be formed from rubber, polymeric material or other plastic, metal, alloy, or composite material that is rigid, semi-rigid or textured. The skirt is assembled over the mounting arms of the rotatable mounting element. Glue is added to each mounting arm of the rotatable mounting element. A sock is inserted over each mounting arm, which holds the skirt in place.

Example embodiments have been described hereinabove regarding adjustable portable device holder systems and methods. Various modifications to and departures from the disclosed example embodiments will occur to those having ordinary skill in the art. The subject matter that is intended to be within the spirit of this disclosure is set forth in the following claims.

What is claimed is:

1. An adjustable portable device holder comprising:

an adjustable clamping element, wherein the adjustable clamping element is capable of being biased into an activated state and unbiased into a deactivated state to removably secure one of a plurality of different size portable devices to the adjustable portable device holder;

the adjustable clamping element comprising two side grips opposingly oriented to one another and each side grip has a device engaging surface that abuttingly engages a portable device in the activated state of the adjustable clamping element, wherein the two side grips linearly translate relative to one another upon transition between the activated and deactivated states of the adjustable clamping element;

the adjustable clamping element further comprising two rods, an expandable arm, a main body, and springs inserted one each over each rod and held in place by a screw affixed to an end of the respective rod; and

a rotatable mounting element attached to the adjustable clamping element by a rotary connection that permits 360 degree clockwise and counter-clockwise rotation of the adjustable clamping element relative to the rotatable mounting element, the rotatable mounting element comprising a pair of mounting arms spaced a distance apart from one another and converging toward one another, each extending at an angle away from a bottom surface of the rotatable mounting element and thereby forming a mounting slot between the pair of mounting arms,

10

wherein the rotary connection positions the mounting slot in various orientations relative to the adjustable clamping element across an entirety of the 360 degrees of rotation.

2. The adjustable portable device holder as recited in claim 1, wherein a width of the mounting slot tapers away from the bottom surface of the rotatable mounting element and wherein the rotary connection is capable of releasably setting the mounting slot in two 180 degree spaced apart vertical orientations and two 180 degree spaced apart horizontal orientations for alternative engagement with vertically and horizontally oriented mounting surfaces.

3. The adjustable portable device holder as recited in claim 2, wherein the mounting surface is an air conditioner vent blade in an automobile.

4. The adjustable portable device holder as recited in claim 1, wherein each mounting arm tapers away from the bottom surface of the rotatable mounting element.

5. The adjustable portable device holder as recited in claim 1, wherein the mounting arms comprise a gripping surface formed from gripping material.

6. The adjustable portable device holder as recited in claim 5, wherein the gripping material is at least one material selected from the group consisting of: rubber, polymeric material, plastic, metal, alloy and composite material.

7. The adjustable portable device holder as recited in claim 5, wherein the gripping surface is textured.

8. The adjustable portable device holder as recited in claim 1, wherein the springs are loadable by an applied expansive force to bias the adjustable clamping element into the activated state.

9. The adjustable portable device holder as recited in claim 1, wherein the adjustable clamping element comprises a gripping surface formed from gripping material.

10. The adjustable portable device holder as recited in claim 1, wherein the device is a smartphone.

11. The adjustable portable device holder as recited in claim 1, wherein the rotatable mounting element is attached with a screw to the adjustable clamping element.

12. The adjustable portable device holder as recited in claim 1, wherein the rotatable mounting element is attached with a ratchet device to the adjustable clamping element.

13. The adjustable portable device holder as recited in claim 1, wherein the rotatable mounting element is attached with a pin to the adjustable clamping element.

14. The adjustable portable device holder as recited in claim 1, wherein the rotatable mounting element is friction fit to the adjustable clamping element.

\* \* \* \* \*



## **Exhibit B**



US00D690707S

(12) **United States Design Patent**  
**Minn et al.**

(10) **Patent No.:** **US D690,707 S**

(45) **Date of Patent:** **\*\* Oct. 1, 2013**

(54) **DASHBOARD VENT MOUNT FOR AN ELECTRONIC DEVICE**

(71) Applicants: **Kenneth Minn**, San Francisco, CA (US); **David E. Yao**, San Francisco, CA (US)

(72) Inventors: **Kenneth Minn**, San Francisco, CA (US); **David E. Yao**, San Francisco, CA (US)

(73) Assignee: **Kenu, LLC**, San Francisco, CA (US)

(\*\*) Term: **14 Years**

(21) Appl. No.: **29/437,793**

(22) Filed: **Nov. 20, 2012**

(51) **LOC (9) Cl.** ..... **08-07**

(52) **U.S. Cl.**  
 USPC ..... **D14/447**

(58) **Field of Classification Search**

USPC ..... D14/432, 433, 434, 439, 440, 451, D14/452, 239, 217, 224.1, 251, 252, 253, D14/457, 458, 459, 460, 461; D6/406.1, D6/406.2, 406.3, 406.4, 406.5, 406.6; 361/679.06, 679.21, 679.22, 679.24, 679.26, 361/679.27, 679.28, 679.3, 679.55, 679.56, 361/709; 248/917-924, 133, 136, 139, 150, 248/176.1, 188.6; D12/415

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

D482,039 S \* 11/2003 Chen et al. .... D14/447  
 7,272,984 B2 \* 9/2007 Fan ..... 74/89.17

(Continued)

*Primary Examiner* — Angela J Lee

(74) *Attorney, Agent, or Firm* — Jeffrey Schox; Peter Miller



(57) **CLAIM**

We claim the ornamental design for a dashboard vent mount for an electronic device, as shown and described.

**DESCRIPTION**

FIG. 1 is an elevation view of the back of the dashboard vent mount for an electronic device in a retracted setting; FIG. 2 is a plan view of the top of the dashboard vent mount for an electronic device in a retracted setting; FIG. 3 is an elevation view of left side of the dashboard vent mount for an electronic device in a retracted setting; FIG. 4 is an elevation view of the front of the dashboard vent mount for an electronic device in a retracted setting; FIG. 5 is an elevation view of the right side of the dashboard vent mount for an electronic device in a retracted setting; FIG. 6 is a plan view of the bottom of the dashboard vent mount for an electronic device in a retracted setting; FIG. 7 is an isometric view, from the front right, of the dashboard vent mount for an electronic device in a retracted setting; FIG. 8 is an isometric view, from the back left, of the dashboard vent mount for an electronic device in a retracted setting; FIG. 9 is an elevation view of the back of the dashboard vent mount for an electronic device in an expanded setting; FIG. 10 is a plan view of the top of the dashboard vent mount for an electronic device in an expanded setting; FIG. 11 is an elevation view of left side of the dashboard vent mount for an electronic device in an expanded setting; FIG. 12 is an elevation view of the front of the dashboard vent mount for an electronic device in an expanded setting; FIG. 13 is an elevation view of the right side of the dashboard vent mount for an electronic device in an expanded setting; FIG. 14 is a plan view of the bottom of the dashboard vent mount for an electronic device in an expanded setting; FIG. 15 is an isometric view, from the front right, of the dashboard vent mount for an electronic device in an expanded setting; and, FIG. 16 is an isometric view, from the back left, of the dashboard vent mount for an electronic device in an expanded setting.

**1 Claim, 2 Drawing Sheets**

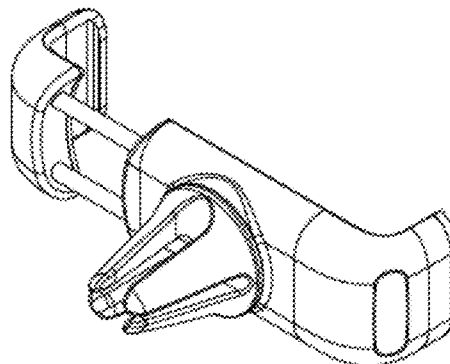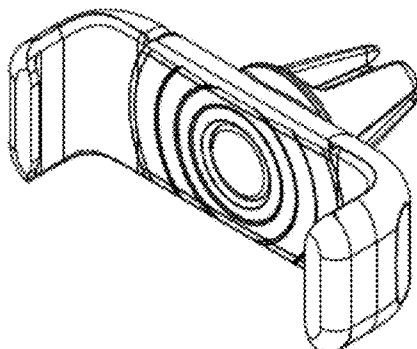

**US D690,707 S**

Page 2

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

D589,962 S *	4/2009	Maruyama et al. ....	D14/432	D656,940 S *	4/2012	McClelland et al. ....	D14/447
D611,478 S *	3/2010	Richardson et al. ....	D14/447	D657,356 S *	4/2012	Wikel .....	D14/253
D630,222 S *	1/2011	Lin .....	D14/447	D663,726 S *	7/2012	Gourley .....	D14/251
D645,033 S *	9/2011	Quong et al. ....	D14/253	D663,735 S *	7/2012	Musselman .....	D14/447
D656,931 S *	4/2012	Wikel .....	D14/253	D664,147 S *	7/2012	Zhao et al. ....	D14/452
				D671,950 S *	12/2012	Richter .....	D14/447
				2011/0019992 A1 *	1/2011	Orf .....	396/419

\* cited by examiner

U.S. Patent

Oct. 1, 2013

Sheet 1 of 2

US D690,707 S




FIG. 1

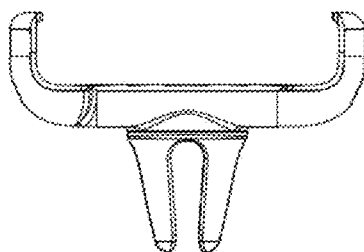


FIG. 2




FIG. 3




FIG. 4




FIG. 5

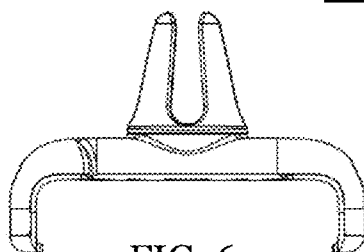


FIG. 6

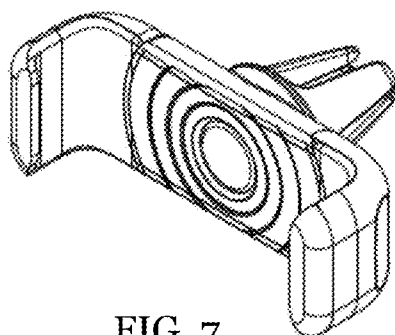


FIG. 7

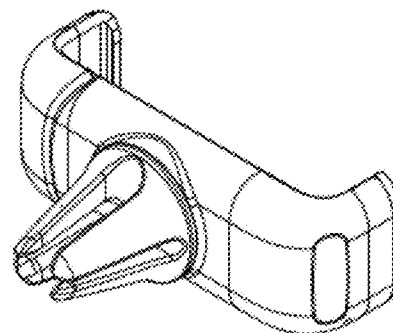


FIG. 8

U.S. Patent

Oct. 1, 2013

Sheet 2 of 2

US D690,707 S




FIG. 9

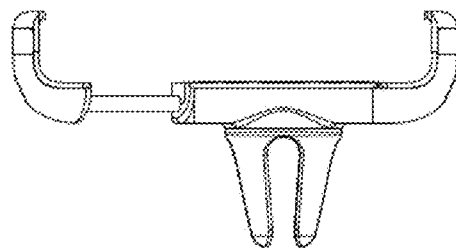


FIG. 10




FIG. 11




FIG. 12




FIG. 13

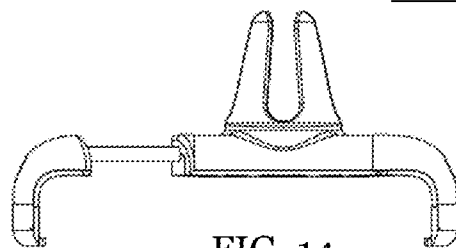


FIG. 14

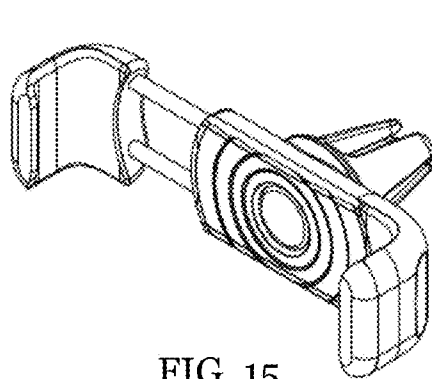


FIG. 15

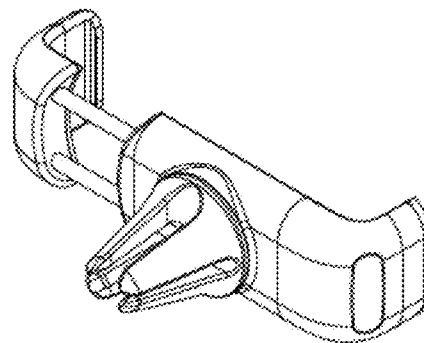


FIG. 16